

Foreword

Thanks for choosing our LED Tri-proof Light. We strongly recommend you to read this manual carefully before installation and usage. Make sure you have completely understood the assembly instructions so as to ensure normal working of LED Tri-proof Light.

Safety Warnings


In order to ensure a perfect quality of the product and a safe usage, please kindly follow the instructions:

1. Before opening the package, please check if there's damage or defect during transportation, if damage occurs, please don't use it and inform your supplier immediately.
2. Should the product be found damaged in any way, please keep it in package and contact your supplier in time.
3. Please do not attempt to use a damaged product.
4. The product should be installed, dismantled and maintained by a qualified electrician; Suppliers don't take charge of any problems or damages that occur due to mishandling such as an operation not permitted in this manual.
5. Choose an install place where can withstand 10 times the weight of the product to ensure a solid installation.
6. Wipe the lampshade and veil with soft cloth dipped a little neutral detergent, be sure not to use any sandpaper, polishing powder or alcohol, gasoline and so on liquor.
7. Don't connect cables with powered on; make sure a correct connection and no short circuit checked with instrument before powered on.
8. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
9. If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by a special cord or cord exclusively available from the manufacturer or his service agent.


This manual applies to this model product only, for more information, please contact our staff.

USER MANUAL

LED TRI-PROOF LIGHT

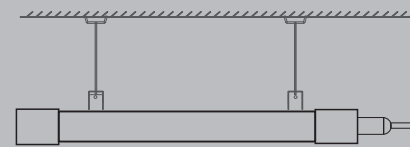

Hanging mounted



Wall mounted / Ceiling mounted



CONTENTS


Product Parameter	1
Product dimension(mm)	1
Installation	2
Foreword	3
Safety Warnings	3

Product Parameter

Ta: -20C - 45C
Beam Angle: 110 deg
Frequency Range Of PSU: 50 / 60 Hz


	Item	Voltage	Power	PF	@3000K	@4000K	@5000K	@6500K
140 lm/w	600mm-18w tri-proof light	AC220-240V	18W	> 0.9	2370 lm	2520 lm	2520 lm	2480 lm
	1200mm-30w tri-proof light	AC220-240V	30W	> 0.9	4030 lm	4200 lm	4200 lm	4150 lm
	1500mm-30w tri-proof light	AC220-240V	30W	> 0.9	4030 lm	4200 lm	4200 lm	4150 lm
	1500mm-50w tri-proof light	AC220-240V	50W	> 0.9	6820 lm	7000 lm	7000 lm	6950 lm
110 lm/w	600mm-20w tri-proof light	AC220-240V	20W	> 0.9	2030 lm	2200 lm	2200 lm	2170 lm
	1200mm-30w tri-proof light	AC220-240V	30W	> 0.9	3040 lm	3300 lm	3300 lm	3250 lm
	1200mm-42w tri-proof light	AC220-240V	42W	> 0.9	4250 lm	4620 lm	4620 lm	4550 lm
	1500mm-42w tri-proof light	AC220-240V	42W	> 0.9	4250 lm	4620 lm	4620 lm	4550 lm
	1500mm-60w tri-proof light	AC220-240V	60W	> 0.9	6070 lm	6600 lm	6600 lm	6500 lm

Product dimension(mm)



Item	L06	L12	L15
L	600mm	1200mm	1500mm


Wiring Diagram

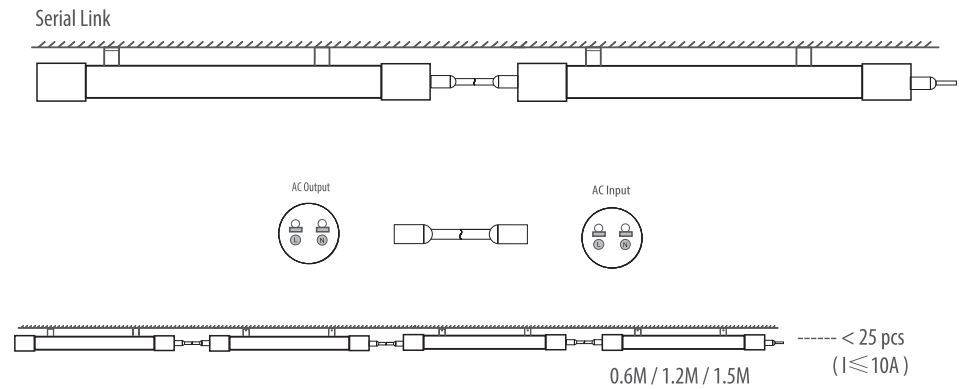

Installation


1. Necessary accessories.

A: Wall mounted / Ceiling mounted




2. As shown in picture below, Two mounting types for option:

A) Wall mounted / Ceiling mounted: Install accessories and tri-proof light as diagram.

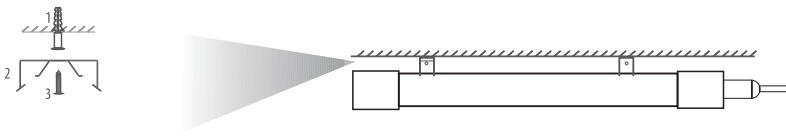

B) Hanging mounted: Install accessories and tri-proof light as diagram .

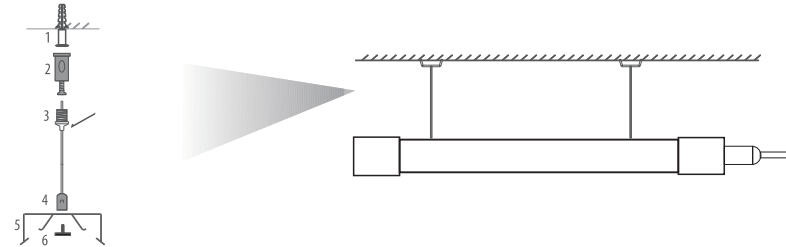

3. After the installation is completed according to figure wiring.

