

Foreword

Thanks for choosing our LED Tri-proof light. We strongly recommend you to read this manual carefully before installation. Make sure you have completely understood the assembly instructions so as to ensure the stable performance of LED Tri-proof light

Safety Warnings


In order to ensure product stability and a safe application, please kindly follow the instructions:

1. Before opening the package, please check if there's damage or defect during transportation, if damage occurs, please don't use it and inform your supplier immediately.
2. Should the product be found damaged in any way, please keep it in package and contact your supplier in time.
3. Please do not attempt to use a damaged product.
4. The product should be installed, dismantled and maintained by a qualified electrician; Suppliers don't take charge of any problems or damages that occur due to mishandling not permitted in this manual.
5. Choose a place which can withstand 10 times the weight of the product to ensure a solid installation.
6. Wipe the lampshade and veil with soft cloth dipped a little neutral detergent, be sure not to use any sandpaper, polishing powder or alcohol, gasoline and similar liquor.
7. Don't connect cables while the lamp is powered on; make sure no short circuit before the lamp is switched on.

This manual applies to this specific product only, for more information, please contact your supplier.

USER'S MANUAL

LED Tri-proof Light

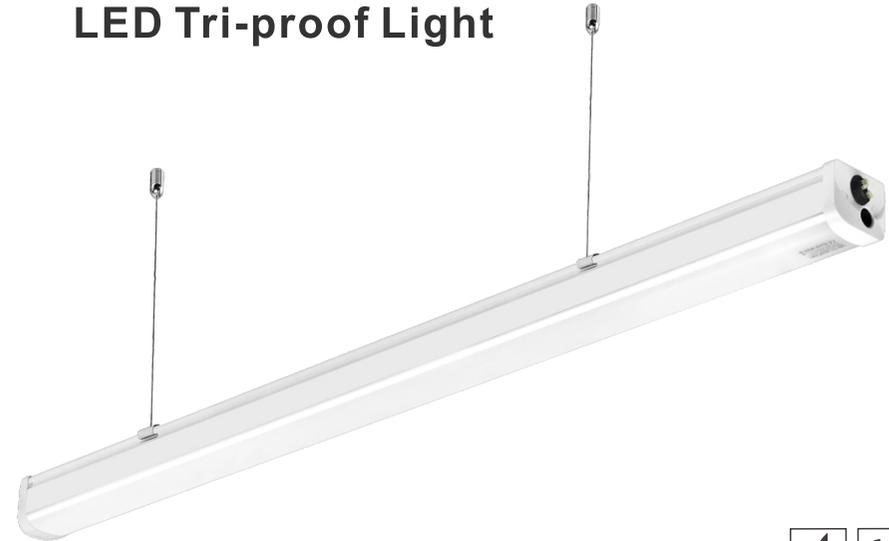


CONTENTS

| | |
|-----------------------|---|
| Accessory List | 2 |
| Product Dimension | 2 |
| Wiring Diagram | 2 |
| Installation Guidance | 3 |
| Foreword | 4 |
| Safety Warnings | 4 |

Accessory List

| No. | Name | Spec | Qty/lamp | Unit | Remark |
|-----|--------------------|-------------|----------|------|----------|
| 1 | Water proof plug | Ø26mm 3Pin | 1x1 | pcs | |
| 2 | Expansion tube | Ø4x28mm | 1x2 | pcs | |
| 3 | Self-tapping screw | 3.8x25mm | 1x2 | pcs | |
| 4 | Clip | L71XW25XH28 | 1x2 | pcs | |
| 5 | Suspension string | L:1m | 1x1 | set | Optional |


Product Dimension(mm)

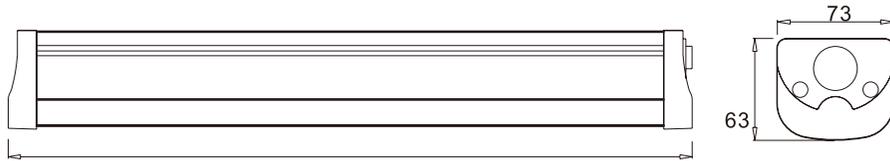


| Item | -L6 | -L12 | -L15 |
|------|-----|------|------|
| Size | 600 | 1200 | 1500 |

Wiring Diagram


Ceiling Type




Hanging

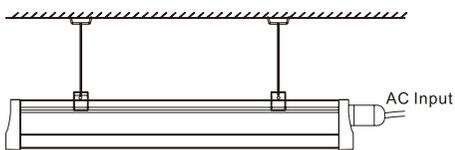

Serial Link



AC Output



AC Input




1.2M/1.5M




Installation Guidance

1 Mounting Methods


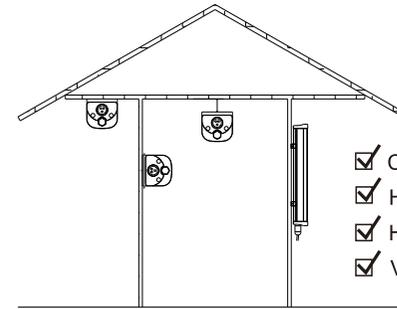


- Ceiling
- Hanging
- Horizontal
- Vertical


| Length | Clip Distance |
|--------|---------------|
| 600mm | 400±20mm |
| 1200mm | 900±20mm |
| 1500mm | 1000±20mm |




2 Input Cable

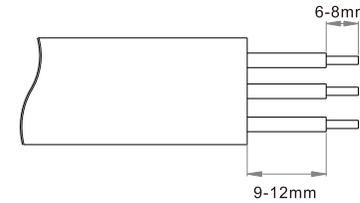


Mind the polarity

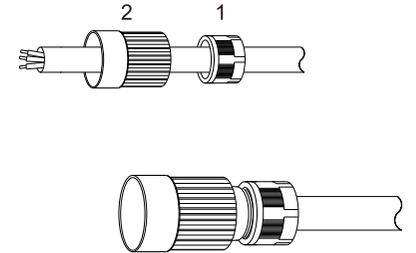

3 Hanging Type

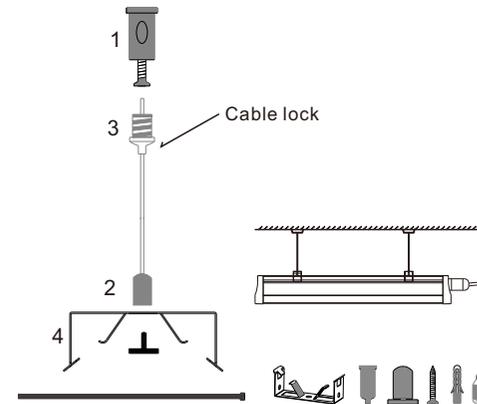

4 Horizontal / Vertical Type

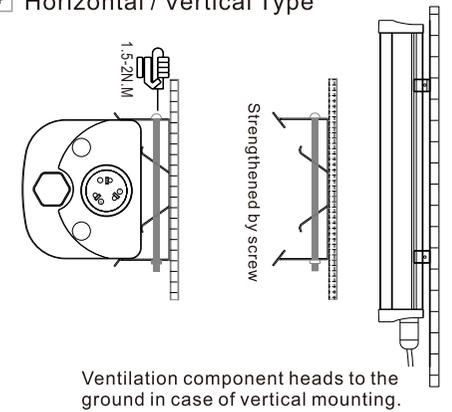

5 Remarks

1. Lock the screws to avoid electricity shock or water steam.
2. Refer to the laser printing on lamp for detailed specification.